





Number	Date	Modification	E	Owner
500000681495	29/08/2023	ADD. ABAS REGIÃO INFERIOR.		MARCELCDC

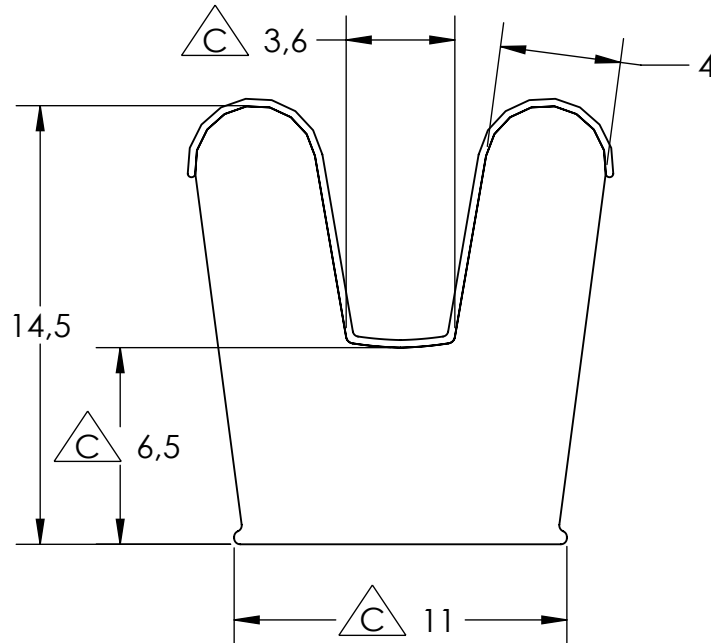

FLOCADO



MATERIAL: BORRACHA

MATERIAL
MATERIAL

NORMA: ASTM_D2000

NORM
NORMA

E M E: BOR_129_91

ENG. MATER. SPECIFICATION
ESPECIFICACION MATERIAL INGENI

COMPRIMENTO: 50000,000

LENGTH
LONGITUD

ALTURA: 14,500

HEIGHT
ALTURA

LARGURA: 11,000

WIDTH
ANCHURA

UNIDADE DO FATOR DE CALCULO: M

UNIT OF FACTOR FOR CALCULATION
UNIDAD DEL FACTOR DE CALCULO

FATOR DE CALCULO: 1,000

FACTOR FOR CALCULATION
FACTOR DE CALCULO

COR: PRETO

COLOR
COLOR.

MATERIAL SOLID WORKS: RUBBER

SOLID WORKS MATERIAL
MATERIAL SOLID WORKS

DUREZA : 65_SHORE_A

HARDNESS
DUREZA

TIPO BORRACHA: EPDM

RUBBER TYPE:
TIPO GOMA:



CARACTERISTICA DE CONTROLE
CONTROL CHARACTERISTIC



Scale: 4:1 Date: 29/08/2023

View System:  Liquid weight(Kg): 0,143

Origin:

Version:

AF

Denomination:

BORRACHA CONTORNO EXT. CAIXILHO

SOLID RUBBER PROFILES
PERFILES DE CAUCHO MACIZO

Project Office:
ENO_MPIO

Reviser by SAP WorkFlow
VIEW IN PLM SYSTEM

Drawer
MARCELCDC

Use:

Code:

98130325

Class: 981301

Tolerâncias quando não especificadas são conforme DIN ISO 3302-1

Where not otherwise specified, tolerances will be in accordance with DIN ISO 3302-1

Dimensões Longitudinais Comprimento	Dimensões Transversais Altura e Largura	Dimensões Longitudinais Comprimento	Dimensões Transversais Altura e Largura	Dimensões Longitudinais Comprimento	Dimensões Transversais Altura e Largura	Dimensões Longitudinais Comprimento	Dimensões Transversais Altura e Largura	Dimensões Longitudinais Comprimento	Dimensões Transversais Altura e Largura
<40 ±1,0	<1,5 ±0,25	40-63 ±1,3	1,5-2,5 ±0,35	63-100 ±1,6	2,5-4,0 ±0,40	100-160 ±2,0	4,0-6,3 ±0,50	160-250 ±2,5	6,3-10,0 ±0,70
250-400 ±3,2	10,0-16,0 ±0,80	400-630 ±4,0	16,0-25,0 ±1,00	630-1000 ±5,0	25,0-40,0 ±1,30	1000-1600 ±6,3	40,0-63,3 ±1,60	1600-2500 ±10,0	63,3-100,0 ±2,00
>4000 ±0,32%	>100 ±2,00%	2500-4000 ±12,5	100,0-200,0 ±2,00	4000-6300 ±12,5	200,0-400,0 ±2,00	6300-10000 ±12,5	400,0-630,0 ±2,00	10000-16000 ±12,5	630,0-1000,0 ±2,00