


Tolerâncias quando não especificadas	
sao conforme DIN ISO 2768-1 classe c = grosso	
Dimensões	0,5 - 3 - 6 - 10 - 15 - 20 - 30 - 40 - 50 - 63 - 80 - 100 - 125 - 160 - 200 - 250 - 315 - 400 - 500 - 630 - 800 - 1000 - 1250 - 1600 - 2000 - 2500 - 3150 - 4000
Longitudinal	+0,2 - +0,3 - +0,5 - +0,8 - +1,2 - +1,6 - +2,0 - +2,5 - +3,0 - +4,0 - +5,0 - +6,3 - +8,0 - +10 - +12,5 - +16 - +20 - +25 - +31,5 - +40 - +50 - +63 - +80 - +100 - +125 - +160 - +200 - +250 - +315 - +400 - +500 - +630 - +800 - +1000 - +1250 - +1600 - +2000 - +2500 - +3150 - +4000
Charro	0,5 - 3 - 6 - 10 - 15 - 20 - 30 - 40 - 50 - 63 - 80 - 100 - 125 - 160 - 200 - 250 - 315 - 400 - 500 - 630 - 800 - 1000 - 1250 - 1600 - 2000 - 2500 - 3150 - 4000
Raio	±0,4 - ±1 - ±2 - ±3 - ±4 - ±5 - ±6,3 - ±8 - ±10 - ±12,5 - ±16 - ±20 - ±25 - ±31,5 - ±40 - ±50 - ±63 - ±80 - ±100 - ±125 - ±160 - ±200 - ±250 - ±315 - ±400 - ±500 - ±630 - ±800 - ±1000 - ±1250 - ±1600 - ±2000 - ±2500 - ±3150 - ±4000

E m e Rev.038.01	
Especificacion material ingeni	
Acabamento superficial: Liso	
Superf. finishing	
Acabado superficial	
Area: 0,060	
Use of	
Uso: Externo	
Form code	
Codigo forma: VERITEM	
Perimetro: 870,000	
Perimetro	

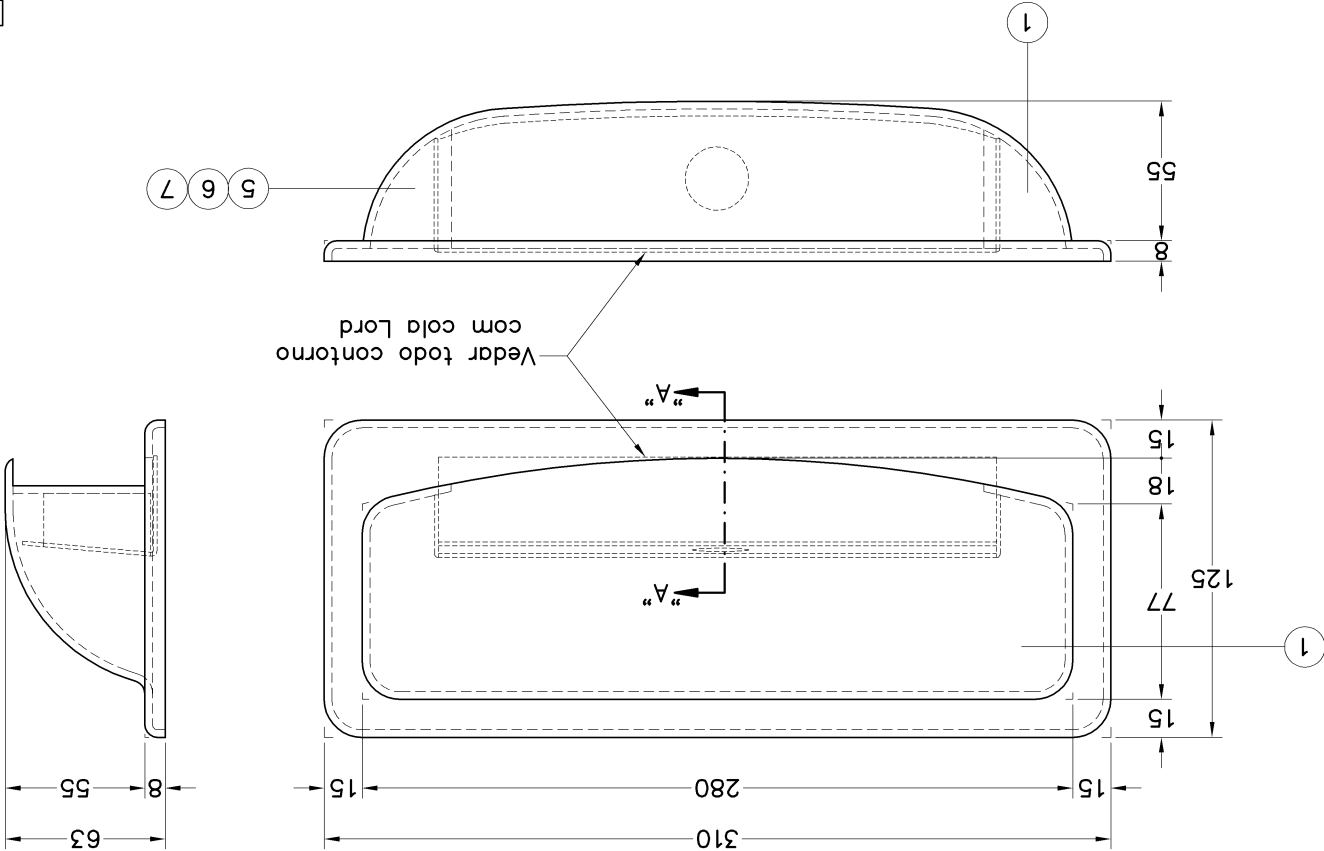

SOLANGE	
Drawn	
View in PLM System	
Review SAP Workflow	
ENQ.MP10	
Project Office	
Marcopolo	
Use:	
Corros com luminaria na lateral	
Code:	
17284870	
Close:	
1728P1	
Computer Aided Design	
Version:	
AF	
View System:	
Liquid weight:	
0,500	
Scale:	
1:2	
Date:	
28.8.14	
Determination:	
ACABAMENTO LUMINARIA	
Luminary finishing	
Acabamento luminaria	

Item	Code	Quantity
0001	10494581	1 UN
0002	98051091	0,009 L
0003	10496403	0,003 L
0004	98051078	0,001 L

Number	500000164473	Date	28.8.14	Modification	ALTERADO QUANTIDADE DOS ITENS 2,3 E 4	Owner	SOLANGE
--------	--------------	------	---------	--------------	---------------------------------------	-------	---------

