




Number	Date	Modification	E	Owner
500000544399	11/06/2021			DANIELOV

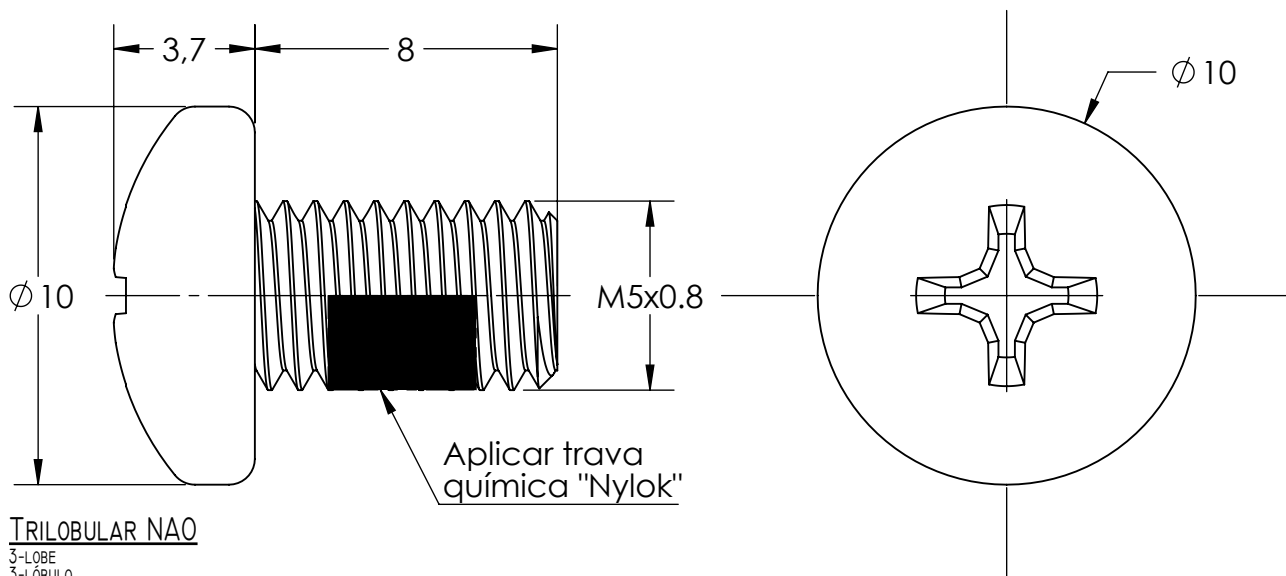

TRILOBULAR NAO

3-LOBE
3-LÓBULO

PONTA BROCA NAO

TIP DRILL
PUNTA BROCA

ALTURA DA CABECA: 3,700

HEAD HEIGHT
ALTURA DE LA CABEZA

TRAVA NYLOK

LOCK
TRABA

TRATAMENTO SUPERFICIAL: FE/ZN-12CI

SURFACE TREATMENT
TRATAMIENTO SUPERFICIAL

CLASSE OU GRAU: 5.8

CLASS OR GRADE
CLASE O GRADO

MATERIAL: ACO

MATERIAL
MATERIAL

NORMA: DIN_7985

NORM
NORMA

COMPRIMENTO DA ROSCA: 8

THREAD LENGTH
LARGURA ROSCA

COMPRIMENTO: 8,000

LENGTH
LONGITUD

ROSCA: M5_X_0.8

THREAD
ROSCA

TIPO DE ROSCA METRICA


THREAD TYPE
TIPO DE HEBRA

TIPO DE FENDA CRUZADA

SCREWDRIVER TYPE
TIPO DE DESTORNILLADOR

FORMATO DA CABECA DO PARAFUSO PANELA

HEAD SHAPE OF THE SCREW
FORMATO DE LA CABEZA TORNILLO

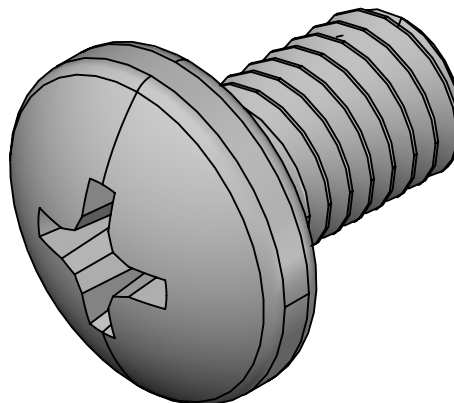

 <i>Marcopolo</i>	Scale: 5:1	Date: 11/06/2021	PARAFUSO DIN 7985 M5X0,8X8MM C/NYLOK SCREW TORNILLO
	View System: 	Liquid weight(Kg): 0,002	
	Origin:		
	Version: AA		
Project Office: ENO_MPIO	Use:		Code: 99010276
Reviser by SAP WorkFlow VIEW IN PLM SYSTEM			
Drawer DANIELOV			
			Class: 005265

Tolerâncias quando não especificadas
são conforme DIN ISO 2768-1 classe c = grosso
When not otherwise specified, tolerances will be as accordance with DIN ISO 2768-1 class c = coarse

Dimensões Longitudinais	0,5 - 3 +0,2	3 - 6 +0,3	6 - 30 +0,5	30 - 120 +0,8	120 - 400 +1,2	400 - 1000 +2	1000 - 2000 +3	2000 - 4000 +4
Chaveta Bóia	0,5 - 3 ±0,4	3 - 6 ±1	6 - 30 ±2	30 - 120 Grav Minuto	120 - 400 ±1*	400 - 1000 ±0' 30"	1000 - 2000 ±0' 15"	2000 - 4000 ±0' 10"