Number	Date	Modification	E	Owner

CARACTERÍSTICAS TÉCNICAS	
Descrição:	Válvula 3/2 vias botão/mola
Faixa de Temperatura:	−40°C a +130°C
Pressão máx. de Trabalho:	12KgF/cm²
Deformação Permanente Vedações:	<2%
Variação de Volume Vedações:	<3%
Resistente a óleo:	IRM 903/ASTM 1/ASTM 3
Vedação resistente a inchamento por água	
Tensão de escoamento vedações:	14MPa (142.76kgF/cm²)
Alongamento vedações:	240%
Pressão mínina de acionamento:	0KgF/cm²
Simbologia:	



Gráfico Força da Mola:

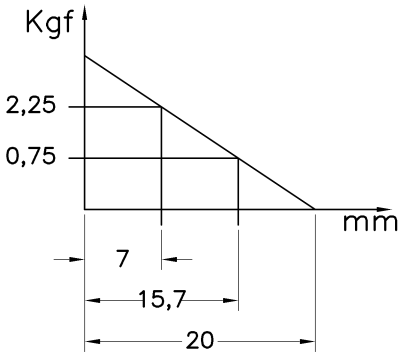

OBS.: Válvula de manutenção rápida sem a necessidade de desmontar do painel.

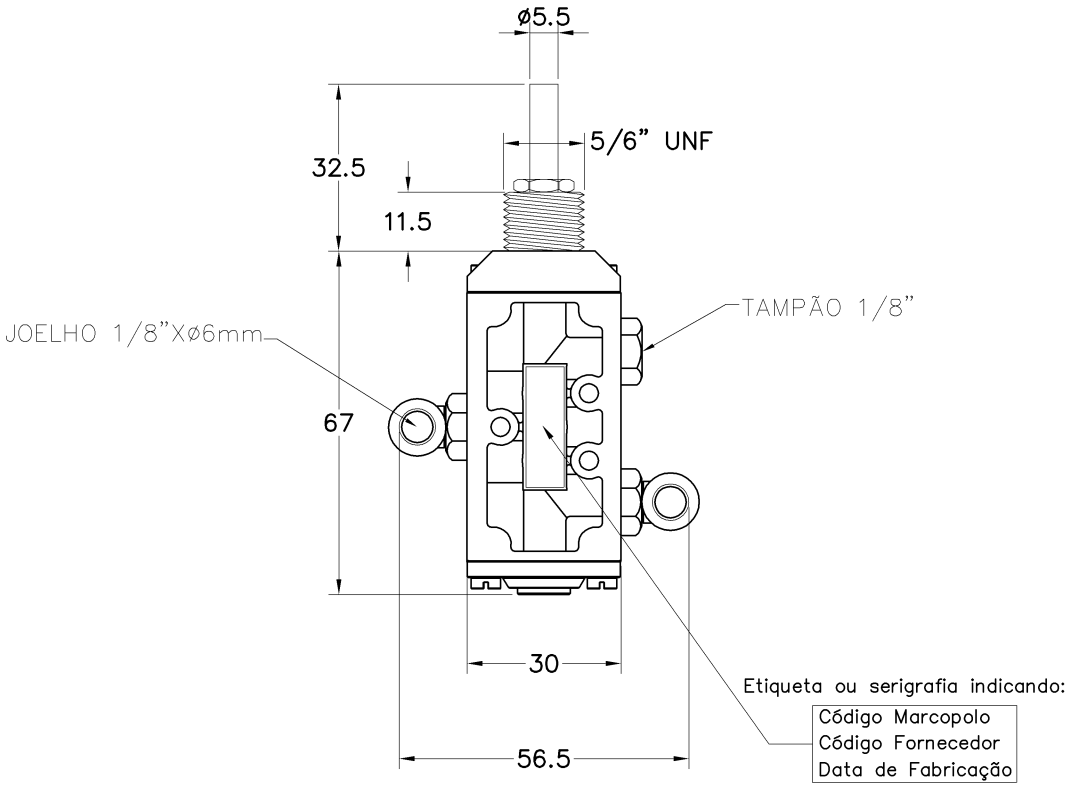

Tolerâncias quando não especificadas
sao conforme DIN ISO 2768-1 classe c = grosso
Where not otherwise specified, tolerances will be in accordance with DIN ISO 2768-1 class c = coarse

Dimensões Longitudinais	0,5 – 3 ± 0,2	3 – 6 ±0,3	6 – 30 ±0,5	30 – 120 ±0,8	120 – 400 ±1,2	400 – 1000 ±2	1000 – 2000 ±3	2000 – 4000 ±4
Chanfro e Raio	0,5 – 3 ±0,4	3 – 6 ±1	6 – 30 ±2	Grau e Minuto até 10 ±1°30'	10 – 50 ±1°	50 – 120 ±0°30'	120 – 400 ±0°15'	acima 400 ±0°10'

N° do material 10079241
Material Number

Marcopolo Caxias do Sul – RS BRAZIL	Scale: 1:1	Date: 6.10.08	Denomination: CONJUNTO VALVULA EVACUACAO SANITARIA Toilet exhaust valve assembly Conjunto valvula de escape sanitario
View System:	Liquid weight (Kg): 0,354		
	Origin: 17210118		
	Version: AA		
Drawer: EVERTPOL	Reviser: EVERTPOL	Approved: JULIANMI	Use: 10079222
			Code: 10079241
			Class: 172128

Computer Aided Design