

Tolerâncias quando não especificados segundo a norma DIN ISO 2768-1 classe f = fino When not otherwise specified, tolerances shall be in accordance with DIN ISO 2768-1 class f = fine									
Dimensões Dimensions	0,5 - 3	3 - 6	6 - 30	30 - 120	120 - 400	400 - 1000	1000 - 2000	2000 - 4000	
Acabamento Finish	± 0,05	± 0,05	± 0,1	± 0,15	± 0,2	± 0,3	± 0,5	± 0,5	
Chav. 6	0,1	0,1	0,1	0,1	0,1	0,1	0,1	0,1	
Rota	± 0,2	± 0,3	± 1	± 1	± 1	± 1	± 1	± 1	


Fonte alimentação LEDs RESISTIVA
LEDs feed source
Fonte alimentación LEDs

Fonte alimentação LEDs REGULADOR_LINEAR
LEDs feed source
Fonte alimentación LEDs




Luz de pisca: TEM
Turn signal lamp
Luz indicadora de direccion

Refletor: NAO_TEM
Reflector
Reflector

Tensão de trabalho: 24V
Voltage
Voltage



POSITION	FUNCTION
1	Ground 3/2/5
2	Stop
3	Light Pipe
4	Ground 6/7
5	Position
6	—
7	Turn signal

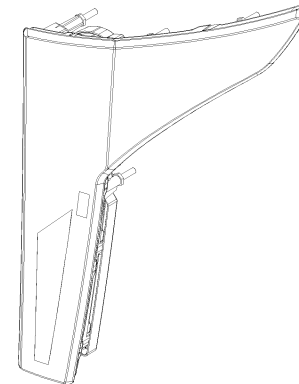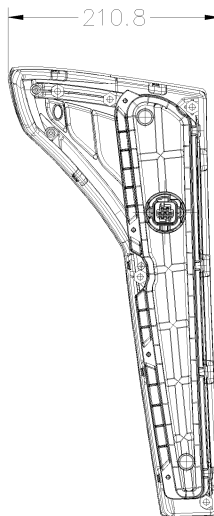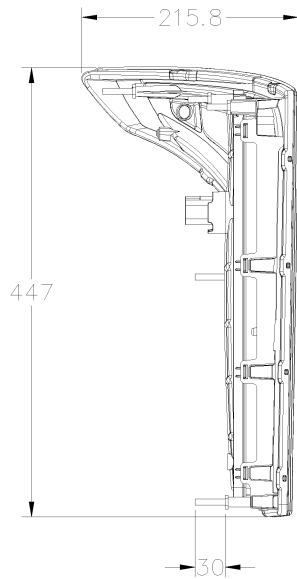

VISTA ISOMETRICA
ISOMETRIC VIEW

NOTA:

Note:

LANTERNA NAO POSSUI FUNCAO RE

Tail lamp has no reversing lamp

ATENDE NORMA ECE

ECE Regulation compliant

10468754	14470-03H	ESQUERDO
10468753	14470-02H	DIREITO
CÓDIGO	REFERÊNCIA	LADO

	Scale: 1:5	Date: 27.7.15	Denomination: CONJUNTO SINALEIRA TRASEIRA Tail lamp assembly Conjunto luz trasera
	View System: 	Liquid weight: 2,600	
	Origin: 10256153	Version: AB	
Project Office: ENV_MP20 Reviser SAP Workflow: View in PLM System Drawer: SERGIOME	User: Volare Fly com bagag. amplo acesso		Code: Computer Aided Design 10468753 Class: 9920B3