


Number	Date	Modification	E	Owner
500000668811	05/07/2023	Migração catia		EDUARDMI

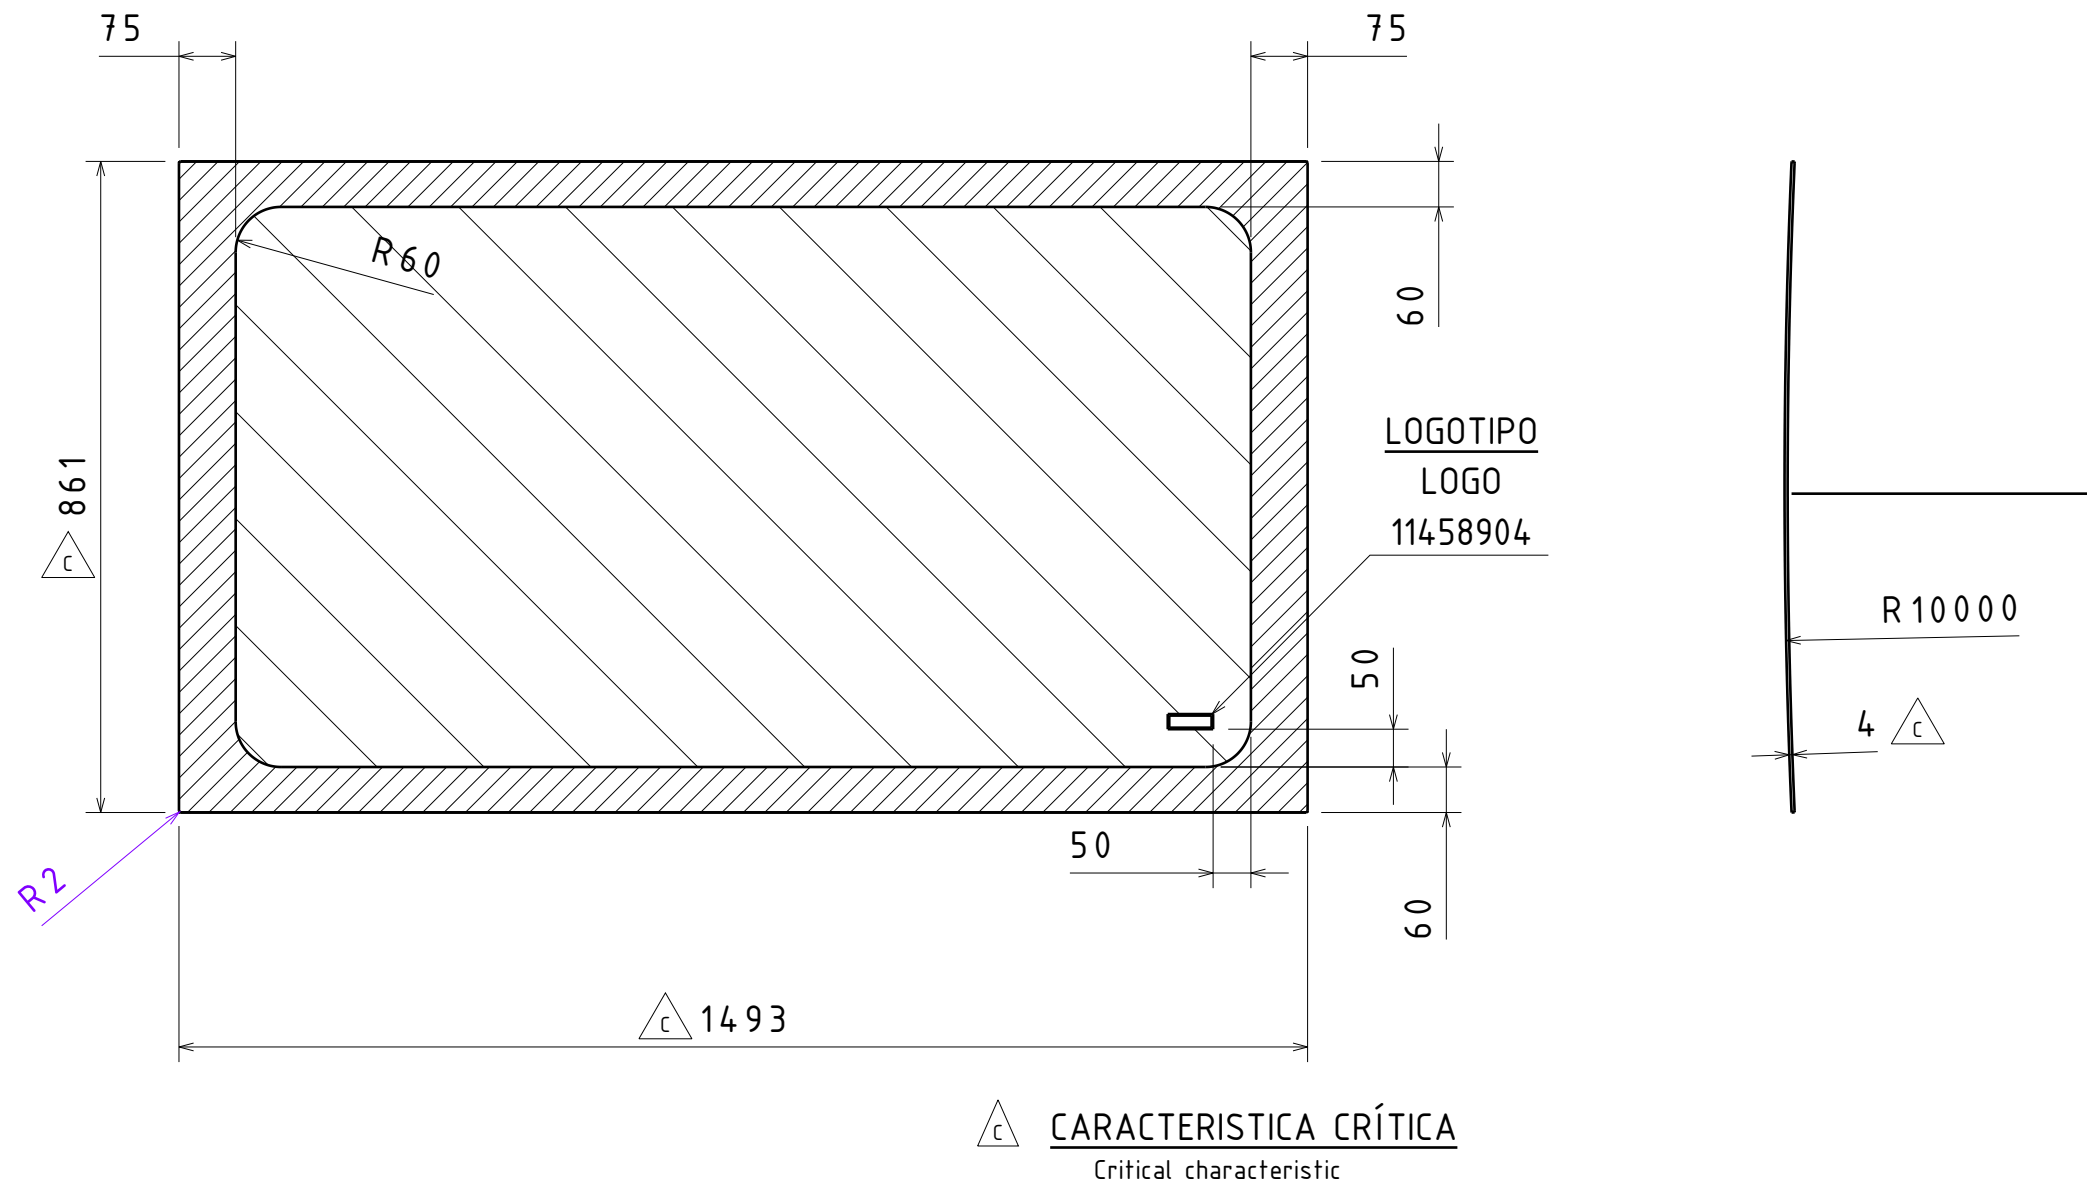

**Aplicar esmalte cerâmico
no lado interno do vidro**
Apply ceramic enamel
in the glass internal side

**Composicao: 82% Esmalte em pó
e 18% e Cera termofluida**
Apply thermoplastic enamel
in the internal side

**Indice de transmissao UV:
0,10% maximo**
UV transmission index: maximum 0,10%

Coloracao: Preto
Color: Black

Material: Vidro temperado lapidado
material: lapidated tempered glass

Cor e transparenciaS:

Fumee transparencia 50% minimo
INCOLOR transparencia 70% minimo
VERDE transparencia 70% minimo
Fumee 50% minimum transparency
COLORLESS 70% minimum transparency
GREEN 70% minimum transparency

Tolerâncias quando não especificadas são conforme DIN ISO 2768-1 classe c = grosso						
Where not otherwise specified, tolerances will be in accordance with DIN ISO 2768-1 class c = coarse						
Dimensões Longitudinais	0,5 - 3 ± 0,2	3 - 6 ± 0,3	6 - 30 ± 0,5	30 - 120 ± 0,8	120 - 400 ± 1,2	400 - 1000 ± 3
						1000 - 2000 ± 3
Classe Rato	0,5 - 3 ± 0,4	3 - 6 ± 1	6 - 30 ± 2	Grau Mínimo	até 10 ± 1° 30'	10 - 50 ± 1°
						50 - 120 ± 0° 30'
						120 - 400 ± 0° 15'
						400 - 1000 ± 4
						1000 - 2000 ± 4
						2000 - 4000 ± 4
						4000 - 10000 ± 4
						10000 - 20000 ± 4
						20000 - 40000 ± 4
						40000 - 100000 ± 4
						100000 - 200000 ± 4
						200000 - 400000 ± 4
						400000 - 1000000 ± 4
						1000000 - 2000000 ± 4
						2000000 - 4000000 ± 4
						4000000 - 10000000 ± 4
						10000000 - 20000000 ± 4
						20000000 - 40000000 ± 4
						40000000 - 100000000 ± 4
						100000000 - 200000000 ± 4
						200000000 - 400000000 ± 4
						400000000 - 1000000000 ± 4
						1000000000 - 2000000000 ± 4
						2000000000 - 4000000000 ± 4
						4000000000 - 10000000000 ± 4
						10000000000 - 20000000000 ± 4
						20000000000 - 40000000000 ± 4
						40000000000 - 100000000000 ± 4
						100000000000 - 200000000000 ± 4
						200000000000 - 400000000000 ± 4
						400000000000 - 1000000000000 ± 4
						1000000000000 - 2000000000000 ± 4
						2000000000000 - 4000000000000 ± 4
						4000000000000 - 10000000000000 ± 4
						10000000000000 - 20000000000000 ± 4
						20000000000000 - 40000000000000 ± 4
						40000000000000 - 100000000000000 ± 4
						100000000000000 - 200000000000000 ± 4
						200000000000000 - 400000000000000 ± 4
						400000000000000 - 1000000000000000 ± 4
						1000000000000000 - 2000000000000000 ± 4
						2000000000000000 - 4000000000000000 ± 4
						4000000000000000 - 10000000000000000 ± 4
						10000000000000000 - 20000000000000000 ± 4
						20000000000000000 - 40000000000000000 ± 4
						40000000000000000 - 100000000000000000 ± 4
						100000000000000000 - 200000000000000000 ± 4
						200000000000000000 - 400000000000000000 ± 4
						400000000000000000 - 1000000000000000000 ± 4
						1000000000000000000 - 2000000000000000000 ± 4
						2000000000000000000 - 4000000000000000000 ± 4
						4000000000000000000 - 10000000000000000000 ± 4

 <i>Marcopolo</i>	Scale: 1:10	Date: 05/07/2023	Denomination: Vidro colado salao Passengers compartment bonded glass Vidrio pegado compartimiento pasajeros
	View System: 	Liquid Weight(Kg): 12,710	
	Origin:		
	Version: AC		
Project Office: ENO_MP10	Use:	Code: P007.00738669	11503220
Reviser by SAP WorkFlow: View in PLM System			
Drawer: EDUARDMI		Class: 1A1106	